



#3

PATENT
0091-0189P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: Harald MERKEL et al. Conf.:
Appl. No.: NEW Group:
Filed: December 4, 2000 Examiner:
For: DEVICE, METHOD AND SYSTEM FOR MEASURING
THE DISTRIBUTION OF SELECTED PROPERTIES
IN A MATERIAL

L E T T E R

Assistant Commissioner for Patents
Washington, DC 20231

December 4, 2001

Sir:

Under the provisions of 35 U.S.C. § 119 and 37 C.F.R. § 1.55(a), the applicant(s) hereby claim(s) the right of priority based on the following application(s):

<u>Country</u>	<u>Application No.</u>	<u>Filed</u>
SWEDEN	0003078-3	August 31, 2000

A certified copy of the above-noted application(s) is(are) attached hereto.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fee required under 37 C.F.R. §§ 1.16 or 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

for James M. Slattery, #28,380

#43,368

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

JMS/PCL/cl
0091-0189P

Attachment

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen



Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Merkel Physik, Kållerød SE
Applicant (s) Mikael Reimers, Västra Frölunda SE

(21) Patentansökningsnummer 0003078-3
Patent application number

(86) Ingivningsdatum 2000-08-31
Date of filing

Stockholm, 2001-11-06

För Patent- och registreringsverket
For the Patent- and Registration Office

Kerstin Gerdén
Kerstin Gerdén

Avgift
Fee 170:-

Device, method and system for measuring the distribution of selected properties in a material

Field of invention

5 This invention relates to a device for measuring the distribution of selected properties in a material, and in particular a device that non-contacting and non-destructively measures the spatial distribution of material properties, such as density, water contents and temperature of materials, by detecting electromagnetic radiation. The invention also
10 relates to a method and a system.

Background of the Invention

Many industrial processes depend on the measurement of material properties as temperature, water contents and material density. A close monitoring of these material
15 properties results often in increased efficiency and improved product quality. Additional benefits are likely to occur, if such measurements can be accomplished fast and in a non-destructive, non-invasive, and non-contacting way with acceptable accuracy.

20 As an example the determination of the temperature distribution in foodstuff during heating process. Here, an on-line monitoring of the temperature distribution helps to avoid cold spots where bacteria are not eliminated completely or to reduce the overdue heating time spent to ensure complete
25 bacteria elimination. This results in a reduced heating time and reduced energy consumption as well as in an increased throughput of the production line.

Material properties are traditionally measured by some form of destruction (sample separation, peeking) but can often be
30 measured by the analysis of transmitted electromagnetic

radiation by evaluating the dielectric response of the material. Measurements using electromagnetic radiation are generally contact-free and non-destructive.

A suitable frequency region of electromagnetic radiation to determine material properties as temperature distribution , water contents and density is the lower microwave region where water absorption is not too large and the wavelength is already short enough to ensure reasonable spatial resolution. The determination of the above material properties is achieved by analysing the dielectric response of the material based on the material's polarisability. Dielectric data of a material sample are typically obtained in analysing the electromagnetic wave's reflection and transmission properties or a combination of both. In order to obtain a distribution of the material properties, a three-dimensional image of the material's dielectric response must be measured. This requires to move the microwave detector setup and the material sample relative to each other.

Prior art instruments make use of either a single measurement frequency or the emission frequency is swept within a frequency interval (FMCW) and the average delay time is calculated from the obtained data.

Prior art that approaches to dielectric imaging, use the transmission of electromagnetic radiation of a single frequency (or a small band) between a multitude of antenna locations or the material sample is shifted and rotated or shifted in two dimensions in order to obtain a spatial resolution. Based on these data the dielectric image is obtained e.g. by the well-known CSI (contrast source iteration) method where the location and strength of polarisation sources are obtained in an iterative process .

Using techniques well-known to a skilled person (i.e. Contrast Source Iteration CSI, as described below) the electromagnetic picture is used to calculate the unknown dielectric functions in the dielectric picture.

5 Starting from Maxwell's Equations (as described by R.F. Harrington, in the book with the title "Time Harmonic Electromagnetic Fields", published by Mc. Graw Hill 1961) one assumes that any region where the dielectric function is different from unity, the electromagnetic field creates bound
10 charges due to polarisation. These bound charges are created by the electric field itself and they oscillate with it resulting in an additional current component:

$$j(p) = \epsilon(p) \cdot u(p)$$

15 where the current density is j , the electric field is u and the dielectric function of the material is ϵ and of the background is denoted ϵ_b . Assume p and q to be two position vectors in a two dimensional cross section of the measurement gap. D is a domain which contains the cross section of the
20 material sample. The vector q denotes the source point of the electromagnetic radiation. Based on that a general relation for the connection between the electric fields in the measurement space is obtained formally by applying the definition of a Green's function for the electric current:

$$25 \quad u_j(p) = k^2 \int_D G(p, q) \cdot j(q) \cdot dv(q)$$

Inserting the above current density relation and splitting the integral yields:

$$u_j(p) = k^2 \int_D G(p, q) \cdot \epsilon_b \cdot u(p) \cdot dv(q) + k^2 \int_D G(p, q) \cdot [\epsilon(p) - \epsilon_b] \cdot u(p) \cdot dv(q)$$

30

Here the first term denotes the electric field when the dielectric response of the background is present only, the second term stands for the fields generated by polarisation i.e. a dielectric contrast. The fields when only a background is presented are referred to as incident fields u^{inc} . Then the field at an observation point incident from the radiation source is (according to an article by P.M. van den Berg, B.J. Kooj, R.E. Kleinman, with the title "Image Reconstruction from Iswich-Data III", published in IEEE Antenna and Propagation Magazine, Vol.41 No.2 April 1999, p.27-32):

$$u_j(p) = u_j^{inc}(p) + k^2 \int_D G(p, q) \cdot \chi(q) \cdot u_j(q) \cdot dv(q)$$

where G denotes the two-dimensional Green's function of the electromagnetic problem

$$G(p, q) = \frac{i}{4} H_0^{(1)}(k \cdot |p - q|)$$

and the polarisability function χ depends on the dielectric function of the material ϵ and the background ϵ_b in the following way:

$$\chi(p) = \frac{\epsilon(p) - \epsilon_b}{\epsilon_0}$$

Defining scattered fields f one obtains directly:

$$F_j(r) = u_j(r) - u_j^{inc}(r) = k^2 \int_D G(r, q) \cdot \chi(q) \cdot u_j(q) \cdot dv(q)$$

From this an integral equation for the scattered electric field at any point r is set up.

$$F_j(r) = \frac{i}{4} k^2 \int_D H_0^{(1)}(k \cdot |r - q|) \cdot \chi(q) \cdot [F_j(q) + u_j^{inc}(q)] \cdot dv(q)$$

This relation is fulfilled exactly when r is equal to the antenna location and the $F_i(r)$ are measured values of the scattered fields for a given wave vector k for a frequency f :

$k = \frac{2\pi}{c} \cdot f$. The values of $F_i(r)$ for the points interior to the

5 region D are only fulfilled approximately. So the above relation has to be solved for a set K of k vectors and a set Q of internal points resulting in a $[K \cdot Q] \times [K \cdot Q]$ non-linear matrix problem for the fields $F_i(r)$ and the polarisabilities $\chi(r)$.

In matrix form the state equation becomes:

10 $u = u^{inc} + G\chi u$

whereas the frequency relation is:

$$F = G\chi u$$

15 Introducing the contrast source $\varphi = \chi \cdot u$ the above relations become

$$\varphi = \chi u^{inc} + \chi G \varphi \quad \text{at all } Q \text{ interior points, for any of the } K \text{ measurement frequencies}$$

$$F = G \varphi \quad \text{at a single antenna location, for any of the } K \text{ measurement frequencies}$$

20

Using the method of conjugated gradients sequences for the contrasts and the contrast sources solving the above problem are obtained.

Objective of the Invention

25

A device has been designed to measure the spatial distribution of the temperature, water contents and density distribution in a material based on the dielectric and magnetic information

contained in transmission measurements obtained using microwave radiation.

This invention covers two methods to resolve such information from measured data:

5 (a) The temperature, density and water contents profile can be obtained by interpolation between a set of previously measured material samples where the profiles are known in advance. There the measurement result is found by a best fit to the interpolation database.

10 (b) The said profile is found by direct calculation of the inverse scattering problem resulting in a known distribution of the dielectric and magnetic properties. Based on models on the dependence of the dielectric and magnetic properties as functions of the wanted parameters, a map of the said
15 properties is obtained directly.

The instrument proposed here may only use one mechanical scanning dimension. Due to the usage of a multi-channel antenna and a multitude of frequencies, a two-dimensional cross-section of the dielectric picture is obtained . This
20 calculation process involves a novel method related to contrast source iteration where the location and strength of polarisation sources are obtained in an iterative process based on transmitted electromagnetic field measurements at a multitude of frequencies. Thereby the antenna patterns must be
25 frequency dependent and they are assumed to be directed in cross section of the sample allowing an essentially two dimensional approach.

In order to facilitate the calculation of the dielectric parameters, regions where the dielectric properties are at
30 first order constant are obtained by an e.g. evaluating video

5 pictures taken from at least two different points of view with overlapping image region. From these video pictures a reasonable guess of the material sample's dielectric structure is made. As an alternative ultrasound images can be used for the same purpose or a three dimensional image of the material sample may be stored in a memory.

Summary of the Invention

10 The object with the invention is thus to provide a device that measure the spatial property distribution in a non-contacting and non-destructively way.

In accordance with the invention this object is achieved by the features in the characterising portion of claim 1.

This object is also achieved by the features in the characterising portion of claim 12 and claim 17.

15 An advantage of the invention is that it provides on-line fast measurements of spatially resolved material parameter distributions by means of a combined application of microwave reflection and transmission measurements and a three dimensional contour of the material.

20 Traditionally the temperature and density of the material samples is obtained by probing a certain fraction of the material samples. This method allows a complete on-line monitoring of all material samples in production increasing the degree of product control.

25 The accuracy of the measurement is checked by means of calibration samples with known constituents and known temperature profile which are measured at regular intervals. Thereby it is sufficient to perform invasive temperature measurements after the sample has been measured at different

points of the sample and compare them to the instrument's findings. As a additional verification process the same procedure can be repeated when the sample has e.g. cooled down.

5 Summarising the advantages of this invention it provides a non-destructive, non-invasive and non-contacting, fast and automatic measurement process of the water contents and temperature distribution of dielectric bodies requiring minimal human intervention. The measurement process is
10 insensitive to changes in product size, form and positioning.

Other features of the current invention will become more apparent in the following detailed description of the preferred embodiment which by means of example illustrate the principles of this invention.

15 **Brief Description of the Drawings**

Figure 1 is a schematic diagram of a first embodiment of a device according to this invention.

Figure 2 is a chart indicating a dielectric model for chicken anticipated for reduction of the amount of unknown variables
20 of the sample's dielectric behaviour.

Figure 3 is a chart indicating a dielectric model for bread anticipated for reduction of the amount of unknown variables of the sample's dielectric behaviour.

Figure 4 illustrate a cross section of a bread loaf, where the dielectric model from figure 3 is mapped.
25

Figure 5 is a schematic chart indicating the evaluation process in order to obtain moisture, density and temperature data from dielectric properties.

Figure 6 is a schematic diagram of a second embodiment of a device according to this invention.

Figure 7 is a flow chart of the whole calculation process.

Detailed Description of Preferred Embodiments

- 5 As shown in Figure 1 the primary elements of a measurement device 10 according to a first embodiment of the present invention are a microwave generator 11, a transmitting antenna 12, a receiving antenna 13, an analyser 14. These elements work together to analyse the distribution of material properties (such as water contents, density and temperature) in a material sample 16. The sample is carried on a conveyor means 17, which may consist of a slide table mounted on a linear motor, and is arranged in a measurement gap between said transmitting antenna 12 and receiving antenna 13.
- 10
- 15 The generator 11 is connected to the transmitting antenna 12 and generates electromagnetic radiation, which is transmitted from the transmitting antenna 12 towards the receiving antenna 13. The material sample 16 is placed between said transmitting antenna 12 and said receiving antenna 13, which indicate that at least a part of the transmitted radiation passed through the material sample 16. The electromagnetic radiation is transmitted in the form of signals 18, each having a first amplitude and phase, and a different frequency within a frequency range.
- 20
- 25 The generator 11 is also connected to the analyser 14, and information regarding the amplitude and frequency of each transmitted signal 18 is sent to the analyser 14.
- The transmitted signals 18 pass, at least partially, through the material sample 16 and are received by the receiving antenna 13 as receiving signals 19 each having a second
- 30

amplitude and phase, which may be different from the first amplitude and phase, for each different frequency.

The receiving antenna 13 is connected to the analyser 14, which receives information regarding the received signals 19.

5 The analyser 14 compares the amplitude and phase of the transmitted signal with the corresponding amplitude and phase for the received signal, for each transmitted frequency.

Each transmitting antenna 12 is designed to emit electromagnetic radiation of a set of selected frequencies partially impinging on and flowing through the material samples 16. Each receiving antenna 13 is designed to receive electromagnetic radiation emitted from any transmit antenna 12 and at least partially transmitted and reflected by the material sample 16. The receiving antenna 13 may be set up at one or more positions enabling to scan the material sample 16.

The analyser 14 acts as interface between the raw data and the user. The output of the analyser 14 consists of a three-dimensional picture of the material sample's properties as density, water contents and/or temperature.

20 Information about the microwave attenuation and runtime (or phase and damping of the microwave power wave) between the transmitting antennas 12 and receiving antennas 13 are calculated in the analyser 14. For each frequency of the chosen frequency set and for a chosen set of transmitting-
25 /receiving antenna pair and at a fixed point on the material sample 16 such a calculation is performed.

In this embodiment of the invention it is assumed that the shape of the material sample 16 is known, and a three dimensional image of the material sample is stored in a memory
30 15 connected to the analyser 14. The three dimensional image

may be used to calculate cross-sectional images for each measurement position of the material sample on the conveyor means 17. Examples of a material where the three dimensional image is known are fluids passing through the gap in a tube or samples having a defined shape, such as candy bars.

For all measurement positions along the material sample 16, the results of the damping and phase measurement, for all frequencies, are used to determine an electromagnetic picture, which is obvious for a person skilled in the art, and since this is not an essential part of the invention these steps are not disclosed in this application. The position information from the memory is saved as a three dimensional surface position data set describing the three dimensional contour of the material sample 16.

The material properties (such as water contents, density and temperature) in a material may be obtained by interpolation of the material property distributions in the following.

Assume a set of material samples has been measured previously as references. The data sets are stored in their original size or in a transformed form to reduce the data size. For these materials, the distribution of the parameters to be measured is known. These can be different temperatures, different temperature profiles, different density and water contents distributions. Extracted parameters of the measurement of these reference products form a point in a high dimensional vector space. To each point in this space a specific distribution of the parameters to be determined is associated by interpolation of the adjacent points of the reference measurements. The measurement results on an unknown product is now associated with another point on this vector space. Since the parameter distribution to be measured is known for a

certain region in the vector space, the distribution associated with the measured point yields the measurement result.

5 On the other hand direct calculation of the material property distribution may be applied.

Together with a three dimensional model of the dielectric structure of the material sample this three dimensional picture is used to determine regions within the measurement gap where the (yet unknown) dielectric function of the
10 material can be assumed non-changing. Figure 2 illustrates a model for chicken 20 and figure 3 illustrates a model for bread 30.

Each model comprises several regions 21, 31, where the dielectric function is assumed to be constant. The number of
15 regions in the models may be adjusted, even during the process of obtaining the material properties, to obtain a smooth, but not too smooth, curve for the dielectric constant as a function of x and y co-ordinates, $\epsilon(x,y)$.

The regions in figure 3 are divided by concentric circles 32
20 and a number of mapping points P1-P14 are arranged on the outer concentric circle 33. The distance between each mapping point is preferably essentially equal.

The appropriate model is adapted to the three dimensional image of the sample material, in this example a bread loaf.
25 Figure 4 illustrates a cross-section 40 of a three dimensional image of the bread loaf together with an x-axis and an y-axis. The contour of the bread is indicated by the line 41, which is derived from the three dimensional surface position data set stored in the memory, and the mapping points P1-P14 in figure
30 3 are mapped upon the contour line 41. The concentric circles

32 in figure 3 are adjusted after the shape of the contour which is illustrated by the lines 42 in figure 4 divides the cross section of the bread loaf into regions 43 where the dielectric constant is assumed constant.

5 Below is described a simplified approach of CSI, anticipating regions where the dielectric function is constant, as indicated in the models described in figure 2 and 3.

Starting with the relation between the scattered field at a given location as a function of the contrast source one can
10 simplify the solution process considerably when the location of regions where the dielectric function is constant are known a priori :

$$u_j(p) = u_j^{inc}(p) + k^2 \int_D G(p, q) \cdot \chi(q) \cdot u_j(q) \cdot dv(q)$$

$$15 \quad u_j(p) = u_j^{inc}(p) + k^2 \int_D G(p, q) \cdot \chi(q) \cdot u_j(q) \cdot dv(q) \\ = u_j^{inc}(p) + k^2 \sum_{n=1}^N \chi_n \cdot \int_{D_n} G(p, q) \cdot u_j(q) \cdot dv(q)$$

where G denotes again the two-dimensional Green's function of the electromagnetic problem

$$G(p, q) = \frac{i}{4} H_0^{(1)}(k \cdot |p - q|)$$

20 and the polarisability χ_n depends on the dielectric function of the material ϵ being constant on the region D_n and the background ϵ_b in the following way:

$$25 \quad \chi_n = \frac{\epsilon_n - \epsilon_b}{\epsilon_0}$$

Obviously the above step reduce the matrix size from the number of contrast sources to the number of different regions taken into account.

5 From the above a similar integral equation for the scattered electric field at any point r is set up.

$$F_j(r) = \frac{i}{4} k^2 \sum_{n=1}^N \chi_n \cdot \int_{D_n} H_0^{(1)}(k \cdot |r - q|) \cdot [F_j(q) + u_j^{inc}(q)] \cdot dv(q)$$

For this relation a similar solution process as in the general case is applied:

10 Below is described a calculation of the dielectric function for one pair of antennas for various frequencies for frequency independent polarisation.

15 Starting with the relation between the scattered field at a given location as a function of the contrast source one can simplify the solution process considerably when the location of regions where the dielectric function is constant are known a priori :

$$u(p, f) = u^{inc}(p, f) + k^2 \int_D G(p, q, f) \cdot \chi(q) \cdot u(q, f) \cdot dv(q)$$

20 In a step similar to the above procedure, the relation is simplified by introducing regions where the dielectric function is assumed to be constant:

$$u_j(p, f) = u^{inc}(p, f) + k^2 \sum_{n=1}^N \chi_n \cdot \int_{D_n} G(p, q, f) \cdot u(q, f) \cdot dv(q)$$

25 where G denotes again the two-dimensional Green's function of the electromagnetic problem

$$G(p, q, f) = \frac{i}{4} H_0^{(1)}(k \cdot |p - q|)$$

and the polarisability χ_n depends on the dielectric function of the material ϵ being constant on the region D_n and the background ϵ_b in the following way:

$$5 \quad \chi_n = \frac{\epsilon_n - \epsilon_b}{\epsilon_0}$$

The wave vector k is defined to be the wave propagation constant in the background medium given by $\epsilon_{r,b}, \mu_{r,b}$:

$$10 \quad k = 2\pi f \sqrt{\epsilon_0 \mu_0 \epsilon_{r,b} \mu_{r,b}}$$

From the above a similar frequency dependent integral equation for the scattered electric field at any point r is set up.

$$F(r, f) = \frac{i}{4} k^2 \sum_{n=1}^N \chi_n \cdot \int_{D_n} H_0^{(1)}(k \cdot |r - q|) \cdot [F(q, f) + u^{inc}(q, f)] \cdot dv(q)$$

15 For this relation a similar solution process as in the general case is applied.

Below is described a calculation of the dielectric function for one pair of antennas for various frequencies for frequency dependent polarisation.

20 A first order approximation for the frequency dependence of the polarisation is obtained by grouping the measurement frequencies in two groups, a group at lower and a group at higher frequencies. The above summarised calculation process is repeated twice and the difference in the obtained
25 polarisation values gives a measure for its frequency dependence.

In order to calculate the material parameters based on dielectric data, the relation between the material parameters

as density, temperature and water content is needed. For most applications the following model for the temperature dependence of the dielectric function of water (extracted from experimental data published in IEEE Press 1995 by A. Kraszewski, with the title "Microwave Aquametry") is:

$$\epsilon_{H2O}(T) = \frac{\epsilon_{\infty}(T)}{1 + \omega^2 \tau(T)} \quad (1)$$

An approach (based on a simple volumetric mixing relation yields the dielectric chart depicted in Figure 5 where the real and imaginary parts of the dielectric function are taken as independent co-ordinates:

$$\epsilon(T, c_{H2O}, d) = (1 - c_{H2O}) \cdot \epsilon_{basis} \cdot d + c_{H2O} \cdot (\epsilon_{H2O}(T) - \epsilon_{basis} \cdot d) \quad (2)$$

Obviously every point in the complex dielectric plane stands for a unique water contents and material temperature when the dielectric properties of the dried base material do not change considerably. An unique density -temperature plot is obtained, when the water contents is uniform.

From the spatial distribution of the dielectric function of the material sample 16, its density distribution moisture content and temperature are readily obtained applying a water model (see equation 1) and a mixing relation (see equation 2). This part of the evaluation is shown schematically in Figure 5, a schematic view of the complete calculation process is given in Figure 7.

The imaginary part of the dielectric constant $\text{Im}(\epsilon)$ forms a first axis in figure 5 and the real part of the dielectric constant $\text{Re}(\epsilon)$ forms a second axis, perpendicular to the first axis. The real part is positive and the imaginary part is negative. Any material without water content have a specific dielectric constant, so called ϵ_{dry} , which vary between point 50

and 51 depending on the material, both only having a real part. On the other hand, pure water having a temperature of 4°C has a dielectric constant 52 comprising both a real part and an imaginary part, and when the temperature of the water increase it follows a curve 53 to a point where pure water has a temperature of 99°C and a dielectric constant 54. The real part of the dielectric constant for materials containing any amount of water decreases with higher temperature and the imaginary part of the dielectric constant for materials containing any amount of water increases with higher temperature. For illustration see the dashed lines in figure 5 for water content of 25, 50 and 75%.

An example of a dielectric value 55 is indicated in figure 5. The value 55 is situated within a region 56 delimited by the curve 53, stretching between point 52 and 54, a straight line between point 54 and ϵ_{dry} and a straight line between ϵ_{dry} and point 52. As mentioned before, if the temperature increase, with constant water content, the value of the dielectric constant 55 moves to the left in the graph as indicated by the arrow 56, and if the temperature decrease, with constant water content, the value 55 moves to the right as indicated by the arrow 57. On the other hand, if the water content decrease, with constant temperature, the value 55 moves towards ϵ_{dry} as indicated by the arrow 58, and if the water content increase, with constant temperature, the value 55 moves away from ϵ_{dry} as indicated by the arrow 59.

For each defined region 43 the calculated, or estimated, dielectric constant may be directly transformed into water content and temperature.

Figure 6 illustrates a measurement device 60 according to a second embodiment of the present invention. This embodiment

comprises the same parts as the first embodiment described in connection with figure 1, except that the memory 15 is replaced with a video imaging arrangement comprising two video cameras 61 and 62, both connected to an evaluation unit 63, which in turn is connected to the analyser 14.

Each video camera 61, 62 continuously take pictures of the material sample 16. The pictures are sent to the evaluation unit 63, where a three dimensional picture is created using known techniques. The resulting three dimensional picture similar to the one that was stored in the memory 15 in the first embodiment.

By using video imaging the system gets more flexible and it is possible to use the measurement device on material samples having an unknown shape or even a changing shape depending the water content and/or the temperature.

In the above evaluation the major reason to use video imaging is to reduce the number of unknowns in the calculation process to obtain the dielectric function's distribution in the material sample. The obtained reduction in calculation time is necessary (at least in today's available calculation power) to speed up the measurement process. In this preferred embodiment, the material samples are easily accessible to video imaging. If this is not the case, alternative solutions are ultrasound imaging. If the material samples have a simple geometric form or if subsequent material samples are very similar, no extra imaging is necessary to perform the above calculation process as described in the figure 1.

The calculation of the dielectric image (of a two-dimensional cross section) of the material sample in the measurement gap is accomplished by solving the previously described inverse scattering problem.

Both video cameras 61 and 62 image the part of the measurement gap. The location of the cameras 61 and 62 are chosen in a way to enable the reconstruction of a three-dimensional picture where the material sample 16 is positioned within the measurement gap.

For each position of the material sample 16 a three-dimensional picture of the sample location in the measurement gap is calculated based on images taken by the video cameras 61 and 62.

In addition the position information contained in the optical image is used together with a priori knowledge of the material structure to obtain a first guess of the dielectric structure under measurement. This enables to reduce the number of unknowns of the dielectric imaging calculation process drastically (about two orders of magnitude) and to speed up the calculation considerably.

Figure 7 show a schematic view of the complete calculation process for the device according to the invention.

As previously described in connection with figure 1 and figure 6, the input data to the analyser comprises the microwave transmission measurements, i.e. information regarding the emitted signals 18 (amplitude and phase for each used frequency) and the detected signals 19 (amplitude and phase for the corresponding frequency). This information is input in the calculation process, 71.

Information regarding the image contour of the material sample 16 is also needed and inputted into the process, 72. A predetermined resolution of the image contour is used to start the calculation process. The resolution may be increased or decreased dependent on the calculation results, as described

below. Information regarding the position of the material sample 16 in the measurement gap is also inputted into the process in 72.

The information from 72 is used to establish an object geometry, 73. A model, for instance as described in figure 3, is thereafter used to determine regions wherein the dielectric function is assumed of the first order, i.e. constant. The number of regions used is set in the model. The selected model, in this case model 30, is used to establish regions in the material sample 16 by adjusting the concentric circles to the result of the object geometry from 73, which is done in 74, as described in figure 4.

The geometry assumptions from 74 and the result from the microwave transmission measurement from 71, is thereafter used to calculate the dielectric constant within each region, 75. The calculation process have previously been described in this application.

Another piece of information is needed to convert the dielectric constant into water content and/or temperature, that is the dielectric constant for the material sample 16, when there is no water content in the material, ϵ_{dry} . This information may be obtained from literature or from previously made measurements on similar material samples, 76.

This information is used to establish the equations defining the relation between the dielectric constant and the water content and temperature, as described in connection with figure 5, 77.

The resulting dielectric constant within each region from 75 is thereafter translated (or converted) into water content and temperature, 78.

If the calculation process is well established the following steps may be unnecessary, but in most cases they are necessary to avoid unreasonable results.

5 In 79, a check is made to determine if the resulting temperature and water contents are reasonable, i.e. the temperature is greater than zero, $T > 0$, the water content is greater than zero, $C_{H_2O} > 0$ (i.e. $\text{Im}(\epsilon) < 0$) and if the water content is less than 100 %, $C_{H_2O} < 100\%$.

10 If any of the above mentioned checks does not pass, the calculation process is fed back via 80, where the position of the material sample is updated. If video cameras are used, as described in figure 6, a new image contour of the material sample is used to repeat the steps 74, 75 and 78. In the case where the image contour information is previously stored in a
15 memory, as described in figure 1, the calculation process may make a small adjustment to the material size, deform the material contour, translate the material in one direction and the repeat steps 74, 75 and 78.

20 If no objections are raised regarding reasonable results in 79 the process continue to 81, where the smoothness of the curve describing the dielectric function across the cross section of the material sample is investigated. If the dielectric function is too smooth or not enough smooth, the process is fed back via 82, where the resolution of the image contour is
25 changed. Thereafter the steps 73, 74, 75 and 78 are repeated before the checks 79 and 81 are performed again.

There is also a possibility to change the number of regions in the used model in 74 to increase or decrease the number of regions to calculate.

If the smoothness of the curve is acceptable, the process proceed to 83, where a new dry dielectric constant, ϵ_{dry} , of the material is calculated depending on the calculated results in the process. If the calculated dry dielectric constant, ϵ_{dry} , does not correspond with the used dry dielectric constant, $\epsilon_{dry,prior}$, the dielectric constant is updated in 84 and the translation of the dielectric function in step 76, 77 and 79 are repeated, before the checks 79, 81 and 83 are performed again.

10 If no objections are raised in 83, the process present the results in the form of water content and or temperature.

The calculation process described in figure 7 is normally performed for a position of the material sample in the measurement gap. When the calculation process is completed the conveyor means 17, on which the material sample 16 is moved to a new position where another measurement is performed. The updated information, regarding , ϵ_{dry} , number of regions, position of material, and so on, are used at the next position to speed up the process.

20 In a further embodiment of the present invention a multiple of receiving antennas may be used to allow a single processing , as described in figure 7, to establish the three dimensional temperature , or water content, distribution within the material sample.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

25 The calculation process in figure 7 only describe the embodiment where the model is used to establish regions, where the dielectric constant is assumed constant.

Claims

1. A device (10; 60) for measuring the distribution of selected properties of a material (16) arranged on a conveyor means (17), said device comprises

5 - an emitter (12) of electromagnetic radiation arranged at one side of said conveyor means (17), said emitter emits electromagnetic radiation (18) in a multiple of frequencies in a selected frequency range towards said material (16),

10 - at least a sensor (13) arranged on an opposite side of said conveyor means (16), compared to said emitter (12), said sensor (13) detects electromagnetic radiation (19) in said selected frequency range being emitted from said material (16), said electromagnetic radiation originating from said emitter (12), and

15 - an analyser (14) is arranged to receive information regarding said emitted electromagnetic radiation (18) and said detected electromagnetic radiation (19), said information comprises amplitude and/or phase for each selected frequency,

characterised in that said device further comprises:

20 - an image device (15; 61-63) which is arranged to send information to said analyser (14), to create a three dimensional contour of the material,

25 said analyser (14) is arranged calculate the selected property distribution in said material (16) based on the received information.

2. The device according to claim 1, wherein said image device is a memory (15), having stored information regarding the three dimensional contour of the material (16).

3. The device according to claim 1, wherein said image device comprises at least an imaging sensor (61, 62) is connected to an image processing device (63), said at least one imaging sensor (61, 62) each detects an image of said material, which is processed into a three dimensional contour of said material in said image processing device (63).

4. The device according to claim 3, wherein said at least one imaging sensor (61, 62) detects a picture of the reflectivity in optical wavelengths.

5. The device according to claim 4, wherein said at least one sensor of a second type is a video camera (61, 62).

6. The device according to any of claim 3, wherein said imaging sensor detects a picture of the reflectivity and transmissivity and propagation speed of sound waves.

7. The device according to claim 6, wherein said at least one sensor of a second type is an ultrasound imaging device.

8. The device according to any of claims 1-7, wherein said analyser (14) is provided with means to interpolate previously measured results, stored in a memory, to obtain the selected property distribution in said material (16).

9. The device according to any of claims 1-7, wherein said analyser (14) is provided with means to calculate the dielectric distribution in said material (16) and convert said dielectric distribution into the selected property distribution in said material (16).

10. The device according to claim 9, wherein said means to calculate the dielectric distribution comprises

- a three dimensional model (20, 30) determining regions within said material (16) where the dielectric function is assumed non-changing, and
- means to apply said model (20, 30) to said three dimensional contour of the material,

whereby a dielectric distribution is obtained.

11. The device according to claims 9 or 10, wherein said device is provided with means to convert said dielectric distribution into the selected property distribution.

12. A method for measuring selected properties of a material (16) arranged on a conveyor means (17), said method comprising the steps:

(a) emitting electromagnetic radiation (18) in a selected frequency range towards said material (16) from an emitter (12) arranged at one side of said conveyor means (17),

(b) detecting electromagnetic radiation (19) in said selected frequency range in a sensor (13) arranged on an opposite side of said conveyor means (16), compared to said emitter (12), said electromagnetic radiation (19) being emitted from said material (16), said electromagnetic radiation (19) originating from said emitter (12),

(c) transmitting information, comprising amplitude and/or phase for each selected frequency, regarding said emitted electromagnetic radiation (18) and said detected electromagnetic radiation (19) to an analyser (14),

characterised in that said method further comprises the steps:

(d) transmitting information, comprising information to create a three dimensional contour of the material, to said analyser (14), and

(e) calculating the selected property distribution in said material (16) by analysing said information in the analyser.

13. The method according to claim 12, wherein the step of calculating the selected property distribution comprises the step of interpolating previously measured results, stored in a memory.

10 14. The method according to claim 12, wherein said step of calculating the selected property distribution comprises the steps:

- calculating of the dielectric distribution in said material using the information regarding emitted (18) and
15 detected (19) electromagnetic radiation, and
- converting the dielectric distribution into the selected property distribution in said material (16).

15. The method according to claim 14, wherein said step of calculating the dielectric distribution comprises the steps:

- 20 - providing a three dimensional model (20, 30) determining regions within said material (16) where the dielectric function is assumed non-changing, and
- applying said model (20, 30) to a three dimensional contour obtained by an imaging device (15; 61-63).

25 16. A system comprising a device according to any of claims 1 to 11, said instrument evaluates the measurement data based on a method according to any of claims 12 to 15 in order to obtain information on the spatial distribution of the said

dielectric and magnetic properties of said materials, which information is used to calculate the temperature, density and/or water contents distribution of said materials.

Summary

The present invention relates to a device for measuring the distribution of selected properties of materials, said device comprises an emitter of electromagnetic radiation and
5 furthermore at least one sensor of a first type. The emitter emits electromagnetic radiation in a selected frequency range towards said materials and a sensor of the first type detects electromagnetic radiation in a selected frequency range coming from said materials. The detected electromagnetic radiation
10 having been emitted by said emitter. The device also comprises means to generate a three dimensional image contour information regarding the said material's position in space, and an analyser which (a) receives information from said sensors and (b) processes this information and (c) generates
15 signals containing information about the distribution of said properties as output. The invention also relates to a system and a method for measuring the distribution of selected properties of materials.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190

1/4

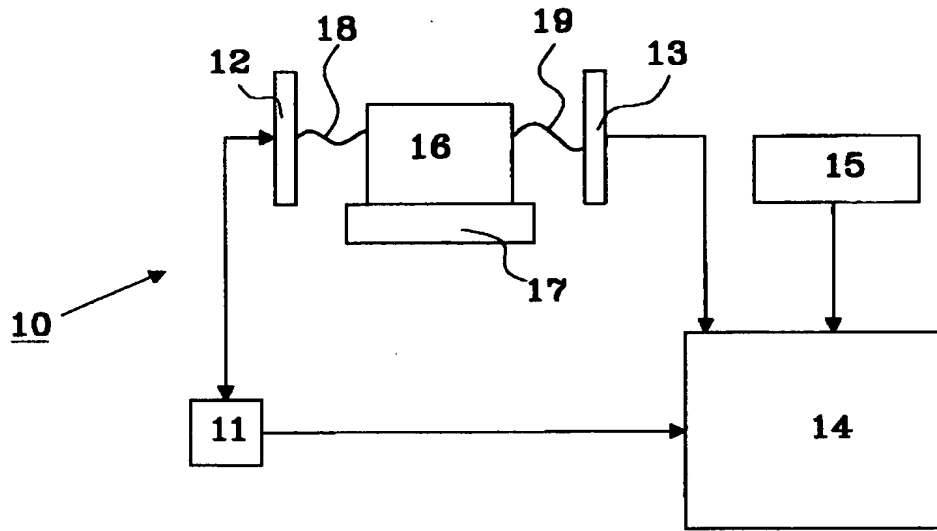


Fig. 1

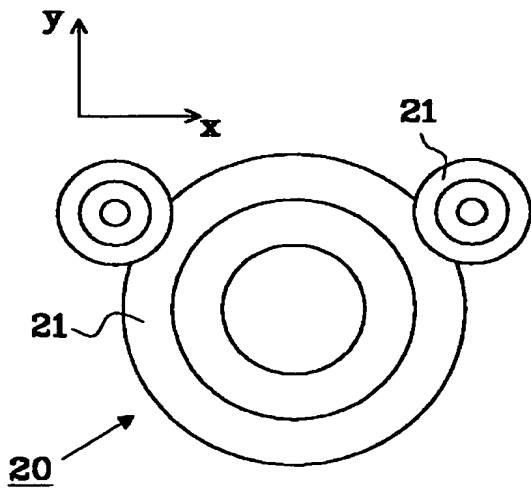


Fig. 2

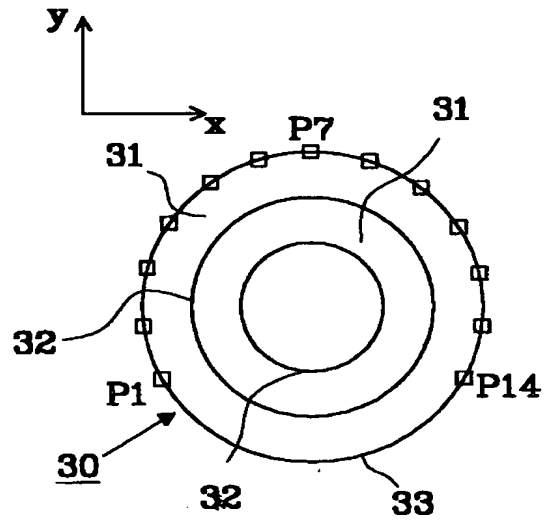


Fig. 3

2/4

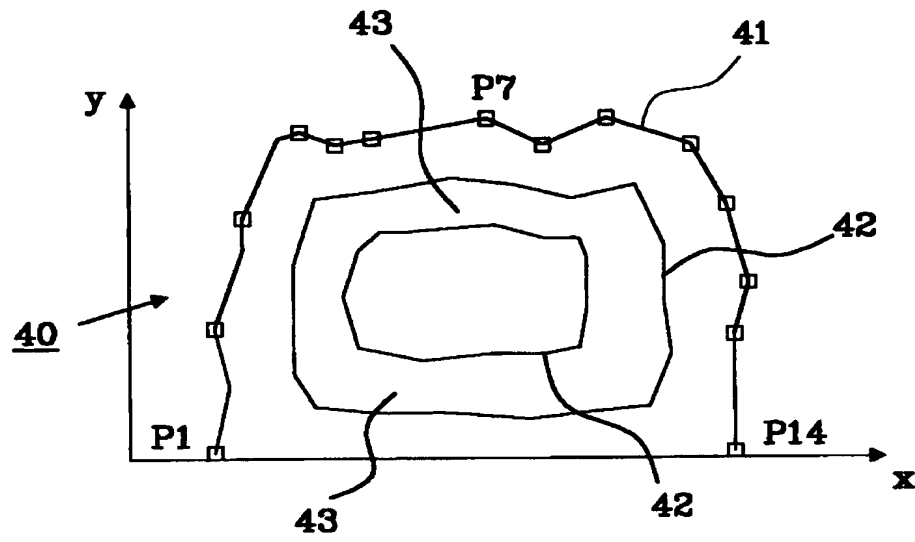


Fig. 4

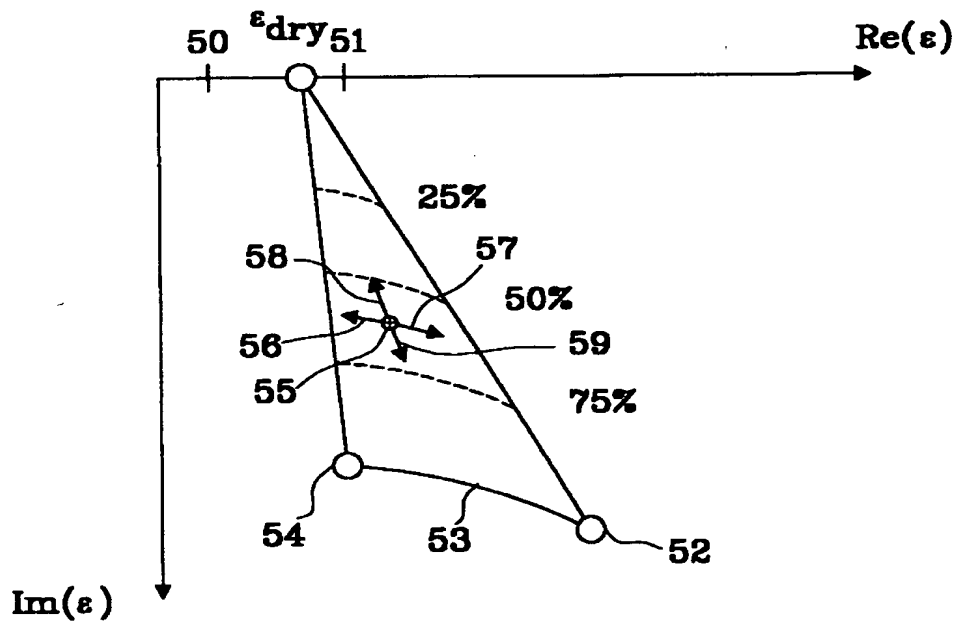


Fig. 5

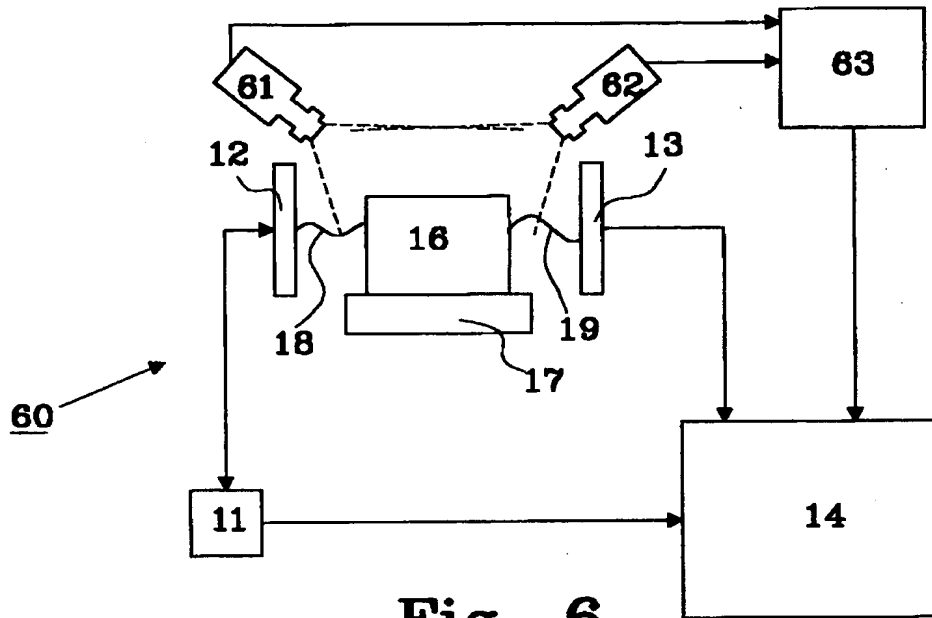


Fig. 6

4/4

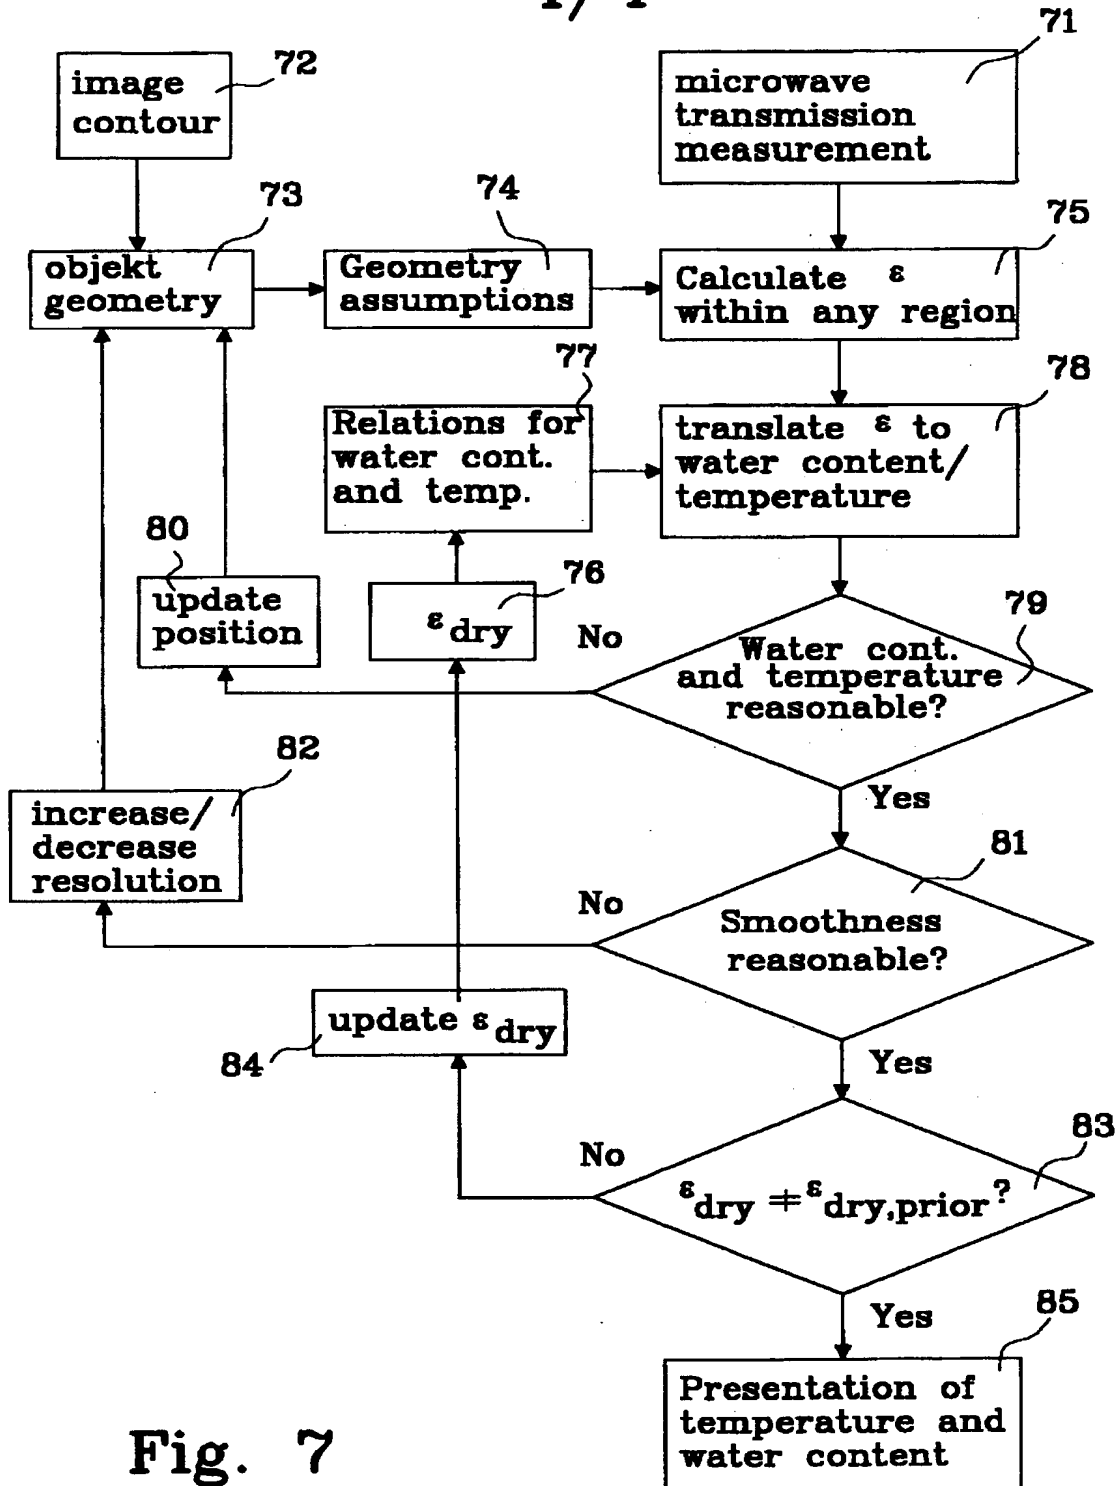


Fig. 7